

SP-WMI20W/30W/40W



DESCRIPTION

SP-WMI20W/30W/40W is a high-performance 20W/30W/40W wall-mount speaker meticulously designed to deliver superior audio clarity for commercial and industrial applications. Featuring a sleek, durable enclosure and cutting-edge acoustic engineering, it provides exceptional sound coverage and reliability. Ideal for environments such as conference rooms, shopping centers, educational institutions, and public spaces

FEATURES


- **Minimalist Design:** Sleek aesthetic in white.
- **Premium Build:** Professional wall integration with a refined, high-end look.
- **Superior Sound:** Inverse-phase design with dual high/low-frequency units for clear, rich audio and strong bass.
- **Adjustable Settings:** Rear power knob for input mode selection.
- **Durable Mesh:** 1060 pure aluminum, hardened and anti-oxidation treated, resistant to rust and deformation.
- **Fireproof Casing:** Made of UL94V-0 grade thickened ABS, ensuring durability and safety.
- **High-Quality Drivers:** Treble diaphragm crafted from natural silk film; bass diaphragm from polypropylene, with a 3-3.5 inch magnetic circuit design.
- **Secure Mounting:** Rust-proof precision-treated bracket.




SPECIFICATIONS

Model	SP-WMI20W	SP-WMI30W	SP-WMI40W
Speaker Unit	4"×1, 1"×1	5"×1, 1"×1	6.5"×1, 1"×1
Sensitivity (1m, 1W)	90±2dB	90±2dB	91±2dB
MAX.SPL. (1m)	103±2dB	105±2dB	107±2dB
Frequency Response	95Hz-20kHz	80Hz-20kHz	65Hz-20kHz
Rated Power	20W	30W	40W
Constant Voltage	70V/100V	70V/100V	70V/100V
Constant Resistance	8Ω	8Ω	8Ω
Dimensions (H×W×D)	255×176×170mm	280×194×185mm	310×215×203mm
Net Weight	2.6kg	3.2kg	4.6kg

Hanging hole

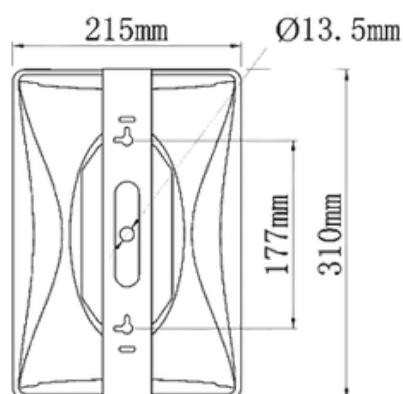

Nail For Mounting

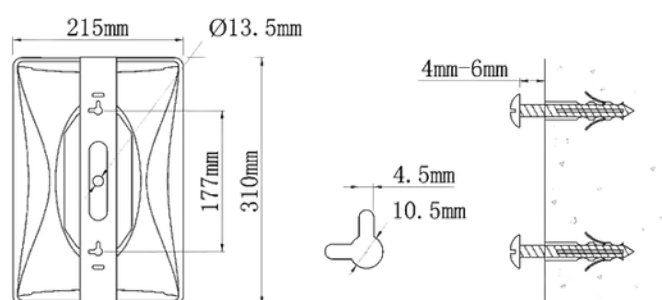

Installation

1. Fit two 4mm nails on wall where it is needed to install a speaker system.
2. Connect audio broadcasting wire to the speaker.
3. Position the speaker, then adjust the direction of it and examine whether it is steady

Cannex Technology Inc.

台灣日旭科技

No.182, Sec. 2, Yuanlu Rd., Sihu Town 514, Changhua County, Taiwan Tel:- +886-4-8613883, FAX:-
+886-6-8828209, Email:- sales@amplimic.com.tw
Home Page : <http://www.amplimic.com.tw>